


# Scissor Lift

# Snorkel

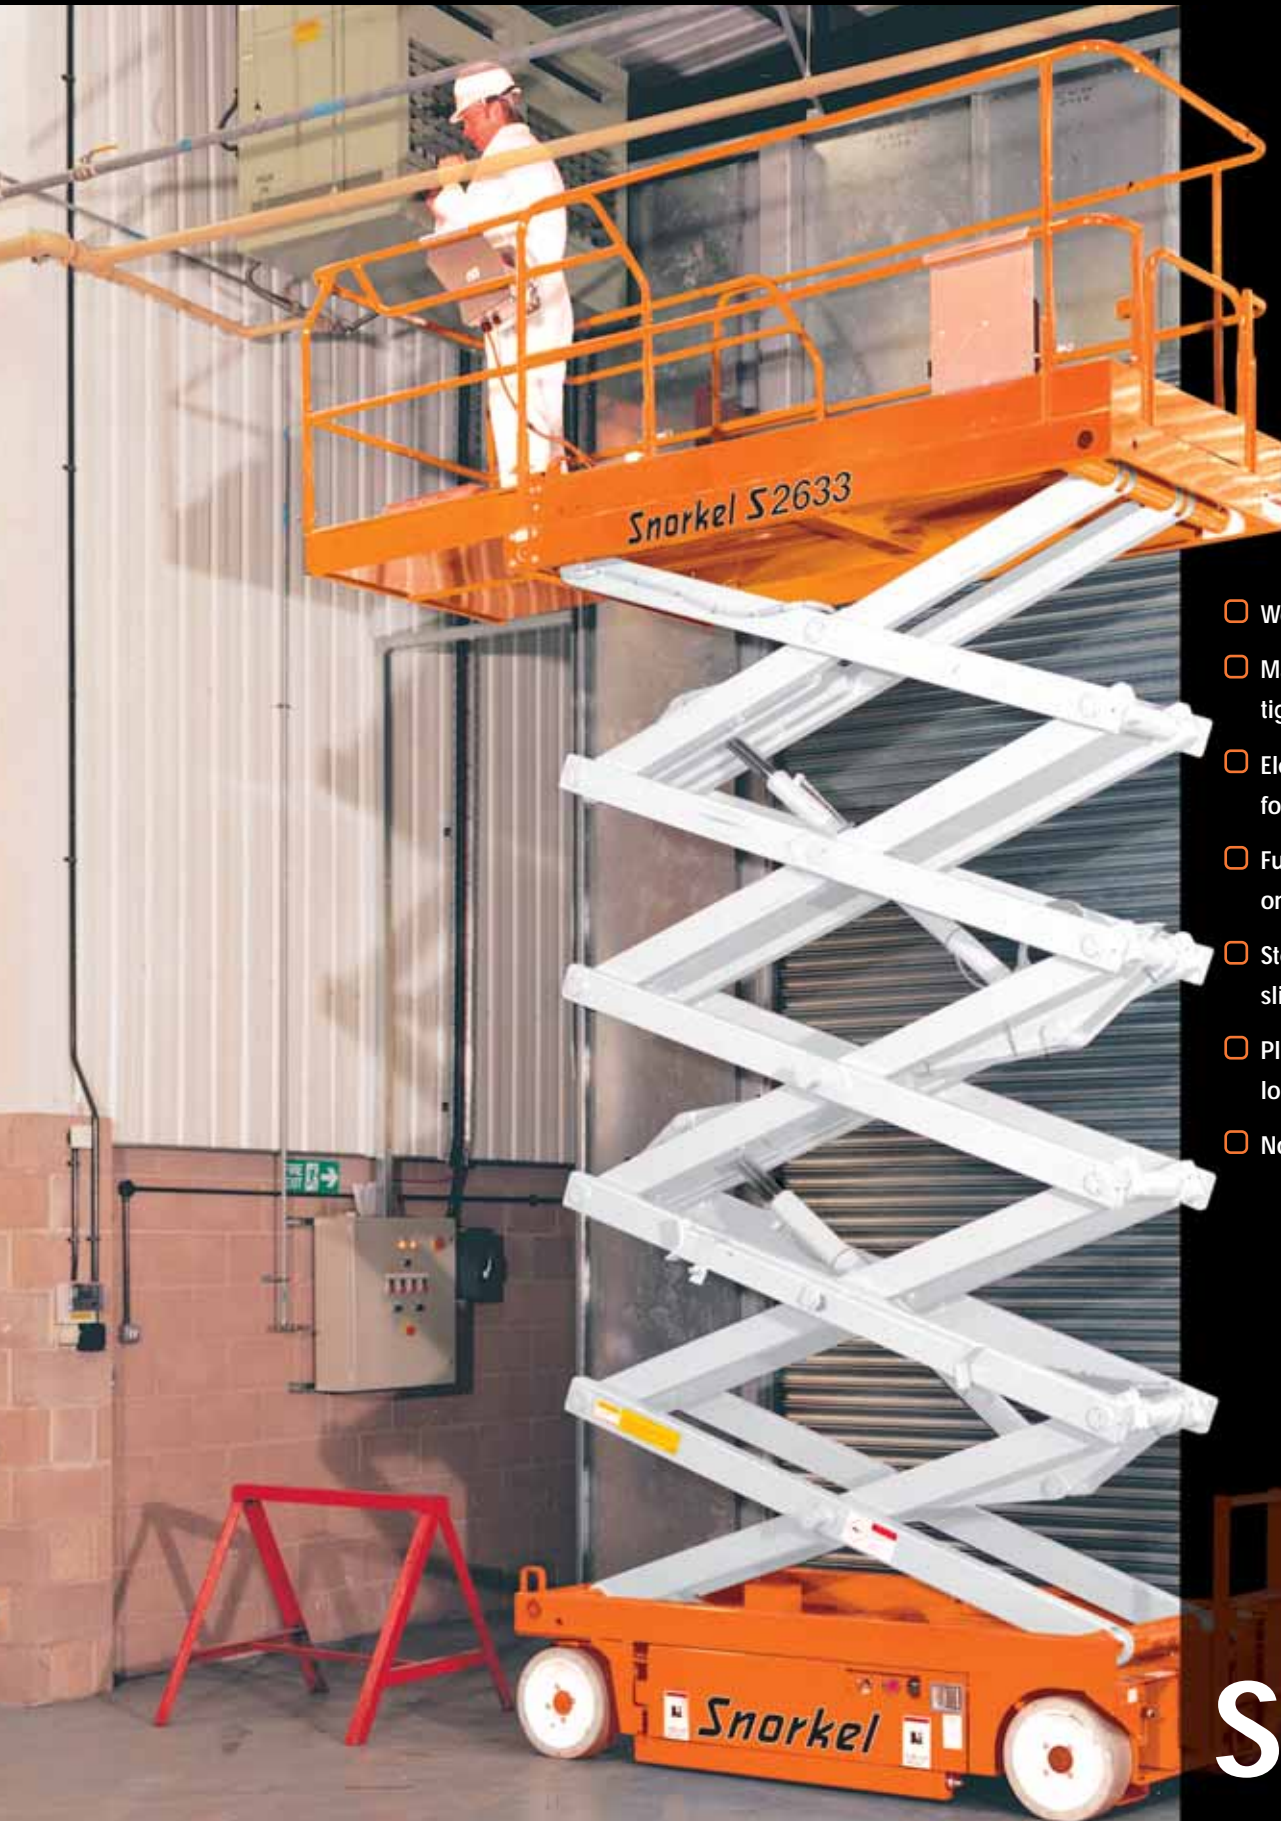

- Working height up to 32ft
- Maneuvers easily with tight inside turning radius
- Electronic motor controller for smooth, quiet operation
- Fully proportional one-hand controls
- Steel deck with slip-resistant surface
- Platform material loading system
- Non-marking tires

# S2633

# S2633 scissor lift specifications

|   | S2633   |
|---|---|
| max. working height <b>A</b>              | 32ft.   |
| max. platform height <b>B</b>             | 26ft.   |
| max. drive height                         | 26ft.   |
| platform capacity (SWL)                   | 750lb.  |
| platform size - inside with deck extended | 2ft.3in.x10ft.5in.                                |
| width <b>C</b>                            | 32.7in.   |
| stowed height <b>D</b>                    |   |
| - with guardrails lowered                 | 6ft. 9in.   |
| stowed length <b>E</b>                    | 7ft.7in.  |
| gross weight                              | 5,198lb.  |
| drive speed max.                          | 2mph  |
| - with platform raised                    | 0.5mph  |
| gradeability                              | 14.5°/25%   |
| inside turning radius                     | 8in.  |
| ground clearance                          | 3.5in.  |
| lift speed - raise/lower                  | 42/40sec  |
| drive system                              | dual front wheel hydraulic motors                 |
| tires                                     | 15in. dia. solid rubber, non-marking              |
| battery charger                           | 25A, 110/220V AC                                  |
| parking brake                             | dual, spring-applied hydraulic release            |
| control system                            | one-hand proportional joystick                    |
| power source                              | 24V 4hp DC electric motor 4 x 6V 220 Ah batteries |

**DANGER:** Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine. Only qualified and trained operators are to be authorized to use and operate a work platform. Aerial work platforms must be elevated only on firm, level surface. Products in this brochure comply with applicable ANSI Standards. This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.




BP1. S2633 USA 12/07

## standard features

- Roll out deck extension
- Proportional controls
- Lift up rear guardrail to ease material loading
- Tilt alarm
- Swing-out service modules
- Crane and forklift points
- Cushion down scissor descent
- Selectable motion alarm
- Non-marking tires
- Quick retract guardrails
- Horn
- Hour meter / low voltage indicator
- 1 year parts and labor warranty
- 4 years structural warranty

## options

- Flashing amber beacon
- Air line to platform
- Special paint colours
- Environmental green oil

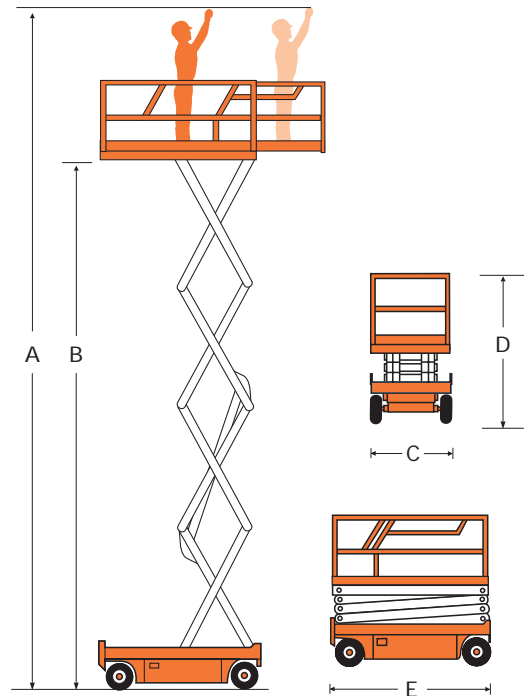

**Snorkel** PO Box 1160, St. Joseph, MO 64502-1160, USA  
 Tel: +1 (785) 989-3000 Toll Free: +1 (800) 255-0317  
 Sales fax: +1 (785) 989-3070 Parts fax: +1 (785) 989-3077  
[www.snorkelusa.com](http://www.snorkelusa.com)

Meets or exceeds applicable requirements of OSHA, ANSI A92.6 and CSA B354.1-04

**CE** This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by  
**Snorkel**  
 INTERNATIONAL

Snorkel