

Trailer Mount

UpRight



- 55ft.9in. max. working height
- 29ft. 10in. max. outreach
- Two person, 440lbs capacity platform
- Articulating/telescopic boom with 4ft.3in., 140° jib
- 90° powered platform rotation
- Hydraulic outriggers
- Rugged, heavy duty construction


TL49K

TL49K trailer mount specifications

TL49K TRAILER MOUNT	
max. working height	55ft.9in.
max. platform height	49ft.3in.
max. outreach	29ft.10in.
platform capacity (SWL)	440lbs
outrigger footprint	15ft.3in. (A) x 15ft.3in. (B)
turret rotation (non-continuous)	680°
platform rotation	90°
platform depth C	2ft.8in.
platform width D	3ft.11in.
stowed height E	6ft.10in.
towing length F	23ft.4in.
towing width G	5ft.9in.
weight (battery model)	4,960lbs*
control system	fully proportional hydraulic controls at platform and ground
power source	24V battery (4 x 6V 195ah batteries)
power options	bi-energy (diesel and DC battery power)

*Machine towing weight depends on power configurations and supply of optional extras.

Specifications subject to change without notice. Photos and diagrams in the brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

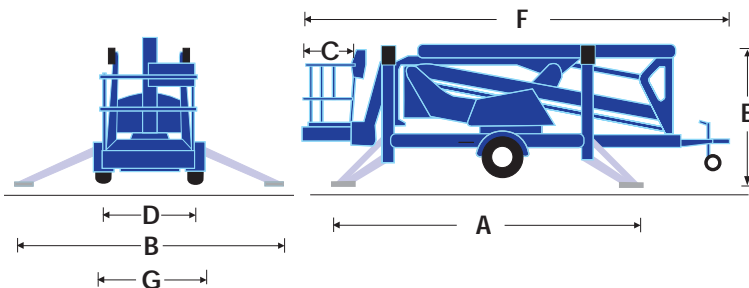

BP2: TL49K USA 12/07


standard features

- 4ft.3in. jib with 140° working arc
- In-line boom design for maximum rigidity
- 90° hydraulically powered platform rotation
- Hand pump emergency lowering from platform
- Lock valves on all hydraulic cylinders
- Proportional live hydraulic controls
- 24V battery (4 x 6V 195ah batteries)
- Automatic reversing and overrun braking
- Integral road lighting board
- 1 year parts and labor warranty
- 5 year structural warranty

options

- Hydraulic friction drive assist system
- Gas power
- Special paint colours

Other options available on request

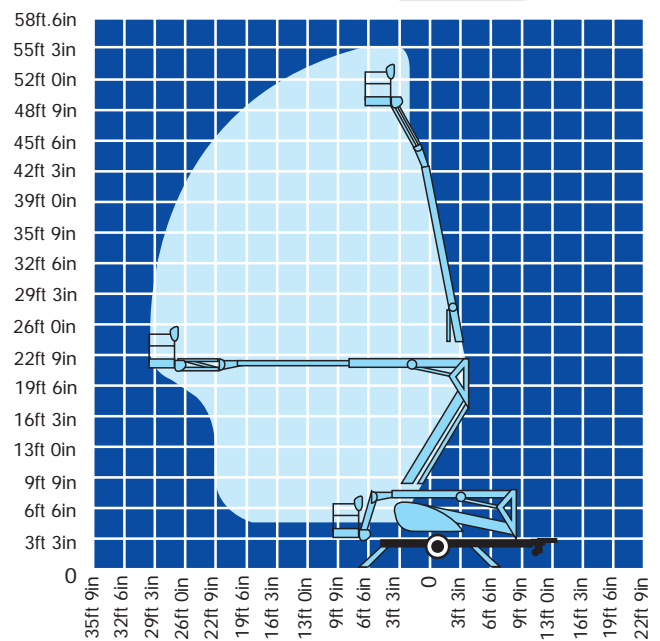

dimensions in ft. & in.

Meets or exceeds applicable requirements of OSHA, ANSI A92.2-2001 and CSA B354.1-04

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight

UpRight

2686 S. Maple Avenue, Fresno, CA 93725

Tel: +1 (866) 843-3350 (Toll Free) / +1 (559) 443-6600 • Fax: +1 (559) 268-2433

www.upright.com